


PINCE DE SUSPENSION

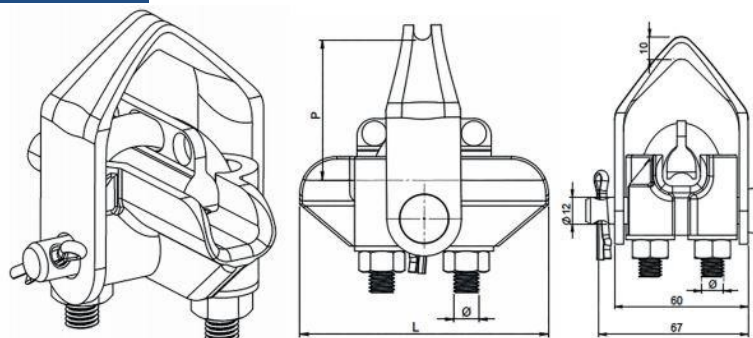

Référence	Codet	Capacité mm ²	L	P	R	Étriers		Charge rupture (daN)	Poids (Kg)
						Nb	Ø		
Pour conducteurs aluminium ou alliage d'aluminium									
65 76 A2	68 60 453	22-93	95	58	-	2	10	1500	0.53
65 95 E2	68 60 303	22-95	95	58	610	1	10	3000	0.47
	68 60 451								
65 150 E2	68 60 452	70-150	155	57	680	1	10	3500	0.67
65 20 B5	68 60 305	75-240	170	58	640	2	12	3500	0.80
Pour conducteurs cuivre									
67 76 A2	68 60 563	16-75	90	58	-	1	10	1500	0.69